MAXHUB 01

MAXHUB Universal Console Model: TCP33T

MAXHUB Universal Console TCP33T is a supporting product of Microsoft Surface Hub to implement multi-touch console solution and enhance your conference control experience. It is equipped with an 11.6-inch touch screen, slim bezel design, anti-fingerprint and anti-glare surface treatment processes, with the function of sharing content on the Surface Hub screen.





One-Cable Technology

Easy and flexible installation with only one cable between the IFP and touch console



Motion Sensor

Automatically sleep/wake your room display on an inactive/ active HDMI video signal to save energy



Content Sharing

Share your content on IFP with an USB-C cable




PoE Power


Support standard power supply and data transmission

Connection Diagram:

Option A: Connect to MAXHUB XBoard V7 Teams Room directly via a RJ45 cable.

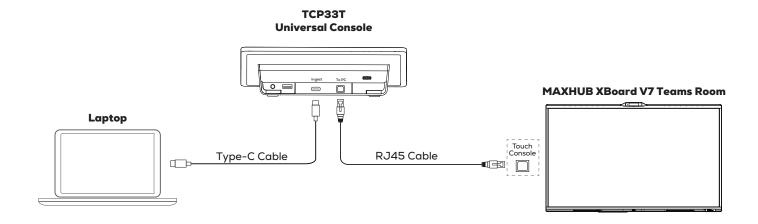

Option B: Connect to Surface Hub Teams Room via the PoE (Power Adapter) and UD20 Interface Converter.

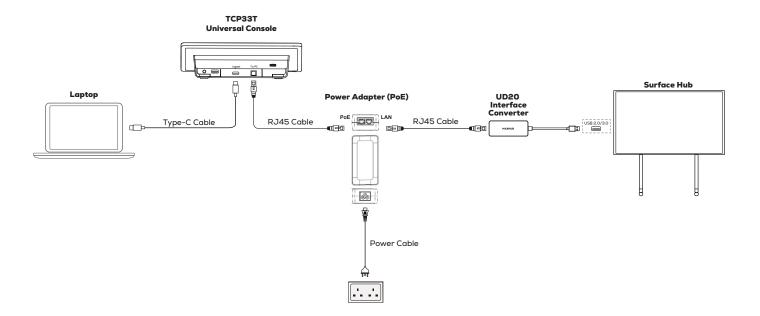

Package Includes:		Package Physical Specification	
TCP33T Universal Console	× 1	Package Dimension (4 pieces)	590 × 440 × 280 mm / 23.23 × 17.32 × 11.02 inch
UD20A Interface Converter	× 1	Package Weight	4.6 kg / 10.14 lbs
PoE Adapter	× 1		

Specification:

Display		Physical Specification	
Size	11.6 inch	Product Dimension	278 × 164 × 82 mm / 11 × 6.4 × 3.2 inch
Resolution	1920 × 1080	(L×W×H)	
Frequency Refresh Rate	60Hz	Product Weight	1.16 kg / 2.56 lbs
Back Light Unit	ELED	I/O Port	
Brightness With Glass	250 nits (Min.) 300 nits (Max.)	USB-C (Content Sharing)	×1
Lifespan	≥ 20000 hours	RJ45 (to connect POE adapter or MAXHUB	× 1
Touch System		XBoard V7 Teams Room	
Туре	Capactive touch	Kensington Slot ×1	
Surface Treatment	Anti-fingerprint, Anti-glare	Standard Accessories	
		Power Cord	× 3
Sensor		Ethernet Cable	
Motion Sensor	PIR sensor for automatic wake-up	(7.5 m/24.6 ft)	× 2
Ultrasound Emitter	Support	UD20A Interface Converter	×1
Environmental Condition		PoE Adapter	
Operating Temperature	0°C ~ 40°C / 0°F ~ 104°C	(Output: 54V, 0.56A 30.24W)	× 1
Operating Humidity	10% ~ 90% RH	Type-C Cable	×1
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F	(1.8 m/5.9 ft)	
Storage Humidity	10%~ 90% RH	Quick Start Guide	× 1
Altitude	Below 5000 m	Screwdriver	× 1

Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product. The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product. The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance. Should the abovementioned change in the document become necessary, the document may be updated without written notice.





